

CFP4-LR4 Transceivers – 100 Gbps

Description:

OPTOKON CFP4-LR4 transceivers is designed for high speed communication applications that requiring rates of from 103.125 to 111.81 Gbps. The transceiver converts 4 inputs channel of 25,78 Gb/s to 27.95 electrical data to 4 CWDM optical signals, and multiplexes them into a single channel through an industry standard LC connector.

CFP4-LR4 transceiver has the Digital Diagnostic Monitor Feature.



Features:

- Compliant with 100GBASE-LR4
- Support line rates from 103.125 Gbps to 111.81 Gbps
- Integrated LAN WDM TOSA / ROSA for up to 10 km reach over SMF
- Digital Diagnostics Monitoring Interface (DDM/DOM)
- Duplex LC optical receptacle
- Single 3.3 V power supply
- Power dissipation < 6W
- CWDM - 1296, 1300, 1305 and 1309 nm

Applications:


- Local Area Network (LAN)
- Data Center
- Ethernet switches and router applications

Safety and regulatory compliance and standards

- Compliant to IEEE 802.3ba
- Compliant to CFP MSA CFP4 Hardware Specification
- Compliant to CFP MSA CFP4 Management Interface Specification
- IEEE 802.3-2012 Clause 45 and 88 100GBASE-LR4
- ITU-T G.959.1-2012-02
- OIF2010.404.08 CEI-28G-VSR electrical specifications



Dimension:

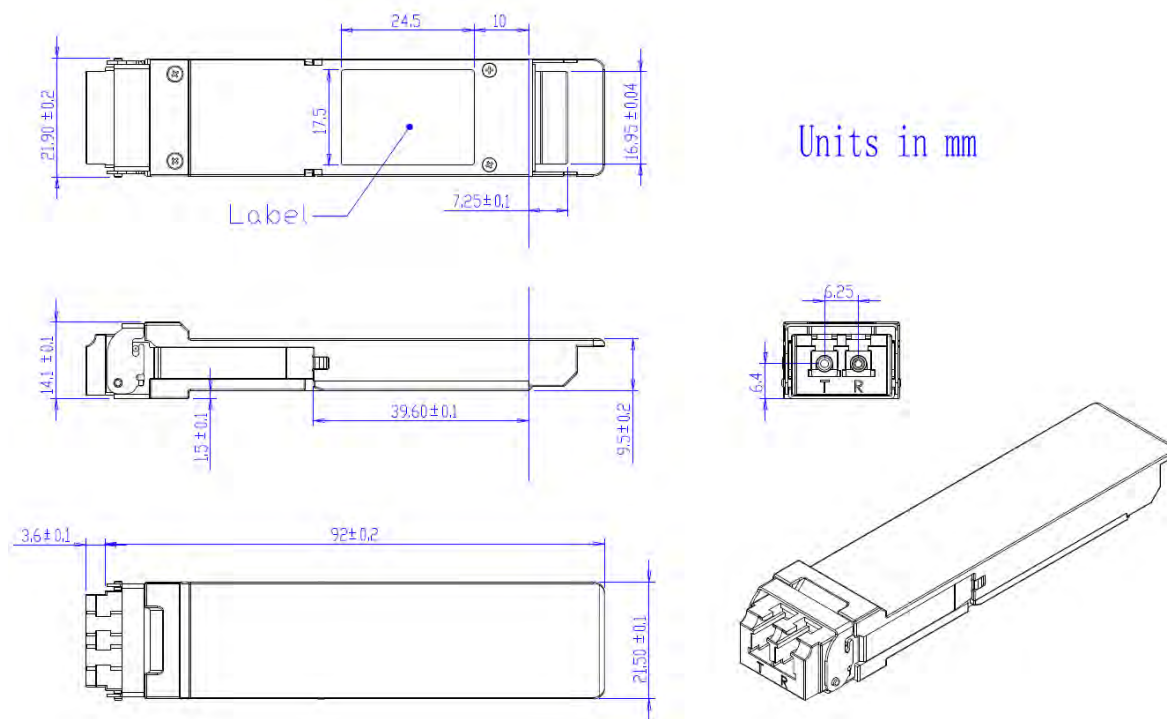

Optical characteristics:

Transmitter:

Parameter:	Min.	Typ.	Max.	Unit
Signaling rate, each lane		25.78125		Gbps
Lane wavelength (range)	1294.53	1295.56	1296.59	nm
	1299.02	1300.05	1301.09	nm
	1303.54	1304.58	1305.63	nm
	1308.09	1309.14	1310.19	nm
Total launch power			10.5	dBm
Average launch power, each lane	-4.3		4.5	dBm
Average launch power of OFF transmitter, each lane			-30	dBm

Receiver:

Parameter:	Min.	Typ.	Max.	Unit
Average receive power, each lane	-10.6		4,5	dBm
Receive power, each lane (OMA)			4,5	dBm
Receiver Sensitivity (OMA), each lane			-8.6	dBm

Ordering code:

Code	Description
S100G-CFP4-LR4-10-D	100 Gbps, CFP 4 housing, up to 10 km, 4x 25 Gbps, LC connector