


Universal Multitube Cable 12-288F (NC)

Full dielectric cable for external or internal installation on cable trays or into duct by pulling

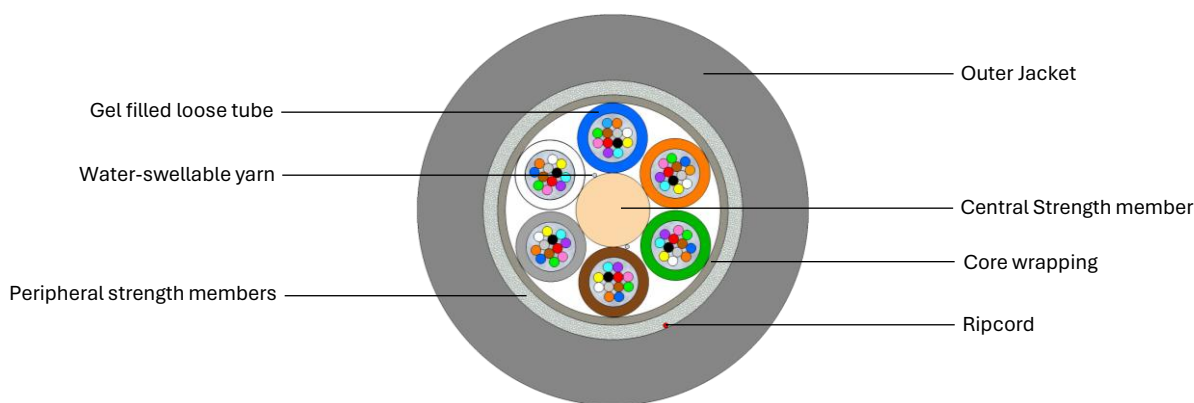

Picture not to scale. For illustration only.

Fibre Type	G.652.D, G.657.A1, G.657.A2, G.655, OM1, OM2, OM3, OM4, OM5
Fibre colour	EIA/TIA-598A
Tube colour	EIA/TIA-598A
Central strength member	FRP rod (coated if necessary)
Core wrapping	Water-swellable tape
Peripheral strength members	Water-swellable glass yarns
Ripcord	1x under outer jacket
Outer jacket material	UV resistant Halogen-free flame-retardant thermoplastic compound
Outer jacket thickness	1.6 mm

Number of fibres	12	24	48	60	72	96	144	288	
Number of fibres in tube	12	12	12	12	12	12	12	12	
Tube count (layers)	1	2	4	5	6	8	12	24	
Filler count	5	4	2	1	0	0	0	0	
Nominal outer diameter (mm)	9.5	9.5	9.5	9.5	9.5	10.5	12.5	14.4	
Calc. cable weight (kg/km)	90	91	92	93	94	115	168	199	
Short-term tensile strength (N)	2300	2300	2300	2300	2300	5100	6600	3500	IEC 60794-1-101
Long-term tensile strength (N)	690	690	690	690	690	1500	2000	1000	IEC 60794-1-101
Short-term crush resistance (N/100 mm)	2000	2000	2000	2000	2000	2000	2000	1700	IEC 60794-1-103
Long-term crush resistance (N/100 mm)	600	600	600	600	600	600	600	500	IEC 60794-1-103
Max. impact loading (Nm)	10	10	10	10	10	10	10	10	IEC 60794-1-104
Min. bend radius not load (OD)	15	15	15	15	15	15	15	15	IEC 60794-1-111
Min. bend radius load (OD)	20	20	20	20	20	20	20	20	IEC 60794-1-111
Operating temperature range (°C)	-40 to +70								IEC 60794-1-201
Storage temperature range (°C)	-40 to +70								IEC 60794-1-201
Installation temperature range (°C)	-15 to +50								IEC 60794-1-201
Water tightness (1 m / 24 hrs.)	No leakage								IEC 60794-1-205
Class of fire reaction	Eca	Eca	Eca	Eca	Eca	Eca	Eca	Fca	EN 50575, EN 13501-6

Number of Fibers	Cable Code (Ordering Code)	Delivery length	Packing
12	OPK-U-MTFDS-12(6x1.7)LTGH-xx-BK*	2100 m ± 5% , 4200 m ± 5%	Solid wooden non-returnable drum
24	OPK-U-MTFDS-24(6x1.7)LTGH-xx-BK*	2100 m ± 5% , 4200 m ± 5%	Solid wooden non-returnable drum
36	OPK-U-MTFDS-36(6x1.7)LTGH-xx-BK*	2100 m ± 5% , 4200 m ± 5%	Solid wooden non-returnable drum
48	OPK-U-MTFDS-48(6x1.7)LTGH-xx-BK*	2100 m ± 5% , 4200 m ± 5%	Solid wooden non-returnable drum
60	OPK-U-MTFDS-60(6x1.7)LTGH-xx-BK*	2100 m ± 5% , 4200 m ± 5%	Solid wooden non-returnable drum
72	OPK-U-MTFDS-72(6x1.7)LTGH-xx-BK*	2100 m ± 5% , 4200 m ± 5%	Solid wooden non-returnable drum
96	OPK-U-MTFDS-96(8x1.7)LTGH-xx-BK*	2100 m ± 5% , 4200 m ± 5%	Solid wooden non-returnable drum
144	OPK-U-MTFDS-144(12x1.7)LTGH-xx-BK*	2100 m ± 5% , 4200 m ± 5%	Solid wooden non-returnable drum
288	OPK-U-MTFDS-288(24x1.7)LTGH-xx-BK*	2100 m ± 5% , 4200 m ± 5%	Solid wooden non-returnable drum

xx – fibre type (see Cable code datasheet)

* Other colour available on request

Print legend: Manufacturer - Cable type – lot number- length marking per 1 m (customer print legend available on request)

Note: Cable marking using the Hot-foil method is done in white. If overprinting is necessary, the color of the text is yellow.