


Universal Unitube Cable (SC-GSH) 900N

Indoor/Outdoor fiber optic cable for installing into ducts or on grids

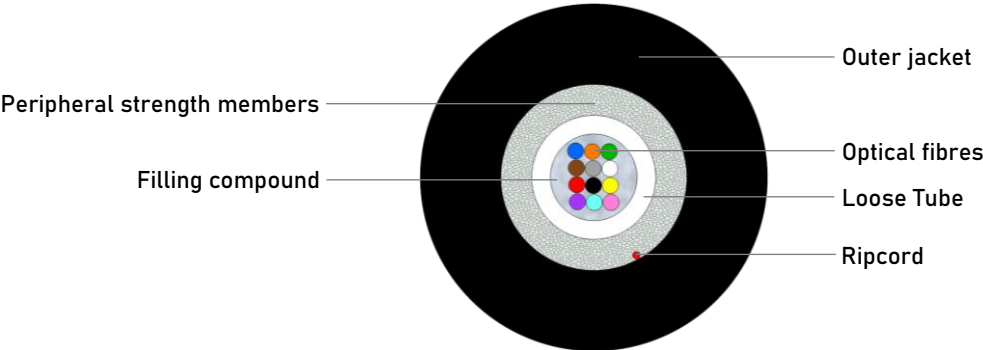

Fibre count	2 – 12
Fibre Type	G.652.D, G.657.A1, G.657.A2, G.655, OM1, OM2, OM2+, OM3, OM4, OM5
Fibre colour	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Tube	PBT buffer tube
Tube colour	Natural / White
Tube diameter	2.0 mm
Filling compound	Low-viscosity filling gel
Peripheral strength members	Water-swellable Glass yarn
Ripcord	1x under outer jacket
Outer jacket	UV resistant Halogen-free flame-retardant thermoplastic compound
Outer jacket thickness	1.0 mm
Cable outer diameter	5.6 mm
Cable Weight (calc.)	28 kg/km

Max. Tensile Loading (Short Term)	900 N
Max. Tensile Loading (Long Term)	290 N
Max. compressive loading	1000 N/100 mm
Max. Impact loading	10 Nm
Min. bend radius not load	10 x OD
Min. bend radius load	20 x OD
Operating temperature range	-20°C to +60°C
Storage temperature range	-40°C to +60°C
Installation temperature range	-15°C to +50°C
Class of fire reaction	Eca

Test procedures EN IEC 60794-1-2, EN 13501-6

Fibre count	Cable Code (Ordering Code)
2	OPK-U-CTFS-2(1x2.0)LTGSH- xx -BK
4	OPK-U-CTFS-4(1x2.0)LTGSH- xx -BK
6	OPK-U-CTFS-6(1x2.0)LTGSH- xx -BK
8	OPK-U-CTFS-8(1x2.0)LTGSH- xx -BK
12	OPK-U-CTFS-12(1x2.0)LTGSH- xx -BK

xx – fiber type (see Cable code datasheet)

Print legend	Manufacturer – Cable type – lot number- length marking per 1 m (customer print legend available on request)
Delivery length	2100 m, 4200 m ±5% on plywood reel