


Indoor Drop Cable

OPK-I-DRPC0023-12(12x0.25)FFAH

Lightweight Cable for indoor use in a wide range of applications in FTTx networks

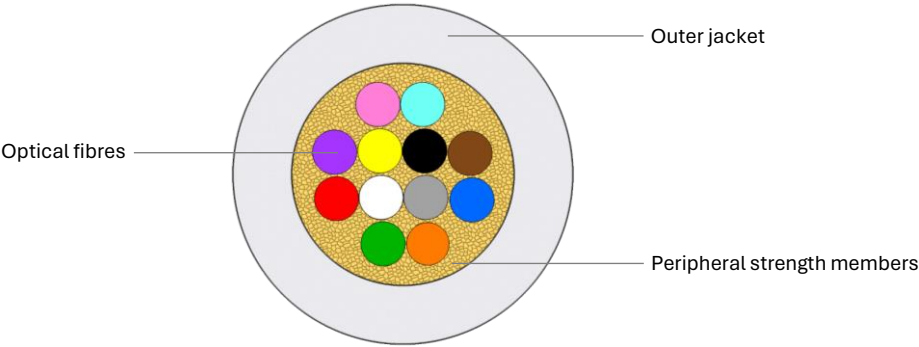

Fibre Type	G.657.B3
Fibre colour	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Peripheral strength members	Aramid yarns
Outer jacket material	White Halogen free flame retardant thermoplastic compound
Outer jacket thickness	0.35 mm

Number of fibres	4	6	8	12	
Nominal outer diameter (mm)			2.0		
Calc. cable weight (kg/km)	3.8	4.0	4.1	4.4	
Short-term tensile strength (N)			50		IEC 60794-1-101
Long-term tensile strength (N)			15		IEC 60794-1-101
Crush resistance (N/100 mm)			10		IEC 60794-1-103
Operating temperature range (°C)		-20 to +60			IEC 60794-1-201
Storage temperature range (°C)		-40 to +70			IEC 60794-1-201
Installation temperature range (°C)		-15 to +50			IEC 60794-1-201
Class of fire reaction		Fca			EN 50575, EN 13501-6

Number of Fibers	Cable Code (Ordering Code)	Delivery length, Packing
4	OPK-I-DRPC0023-4(4x0.25)FFAH-B3-WH	1000 m ± 5% on reel in a box, 2100 m ± 5% on plywood reel
6	OPK-I-DRPC0023-6(6x0.25)FFAH-B3-WH	1000 m ± 5% on reel in a box, 2100 m ± 5% on plywood reel
8	OPK-I-DRPC0023-8(8x0.25)FFAH-B3-WH	1000 m ± 5% on reel in a box, 2100 m ± 5% on plywood reel
12	OPK-I-DRPC0023-12(12x0.25)FFAH-B3-WH	1000 m ± 5% on reel in a box, 2100 m ± 5% on plywood reel

Print legend:Manufacturer - Cable type – lot number- length marking per 1 m

(customer print legend available on request)