


Double Jacketed Tactical Cable

- Resistant to abrasion and cutting
- For harsh environment
- High tensile strength
- Excellent crush resistance
- For military data communication
- Operation in a wide temperature range
- For temporary deployment
- A layer of glass yarn between the jackets as protection against rodents

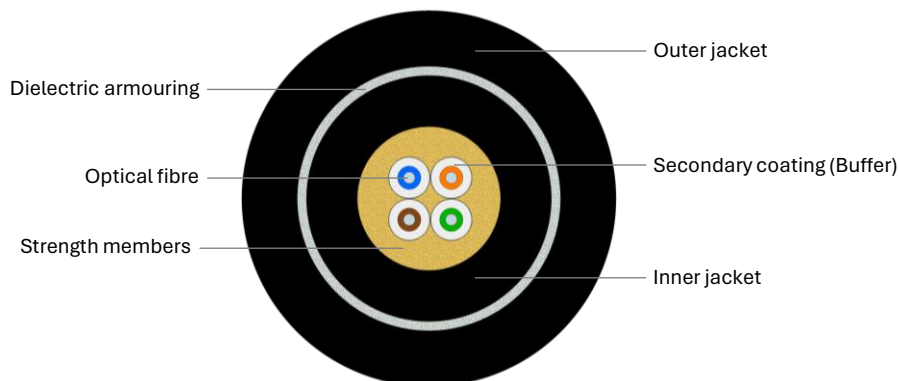

Fibre Type	G.657.A1, G.657.A2, G.657.B3, OM1, OM2, OM3, OM4
Fibre colour	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Buffer diameter	0.9 mm
Buffer material	Polyamide
Buffers colour	Natural-transparent
Strength members	Water-swellable Aramid yarns
Inner jacket material	UV resistant, Flame-retardant (V-0, UL94) Thermoplastic Polyurethane
Inner jacket thickness	1.1 mm
Inner jacket colour	Black
Dielectric armouring	Water-swellable Glass yarns
Outer jacket material	UV resistant, Flame-retardant (V-0, UL94) Thermoplastic Polyurethane
Outer jacket thickness	1.2 mm
Outer jacket colour	Black

Number of fibres	2	4	6	8	12	
Nominal outer diameter (mm)	7.9	8.1	9.1	9.6	9.9	
Calc. cable weight (kg/km)	61	64	77	84	89	
Short-term tensile strength (N)	3000	3000	3600	3800	3800	IEC 60794-1-101
Long-term tensile strength (N)	960	960	1150	1200	1200	IEC 60794-1-101
Crush resistance (N/100 mm)			5000			IEC 60794-1-103
Max. impact loading (Nm)			20			IEC 60794-1-104
Abrasion resistance (10 N load)			10 000 cycles			IEC 60794-1-102A
Min. bend radius not load (mm)			10 x OD			IEC 60794-1-111
Min. bend radius load (mm)			15 x OD			IEC 60794-1-111
Operating temperature range (°C)			-40 to +85			IEC 60794-1-201
Storage temperature range (°C)			-55 to +85			IEC 60794-1-201
Installation temperature range (°C)			-40 to +70			IEC 60794-1-201
Water tightness (1 m / 24 hrs.)			No leakage			IEC 60794-1-205
Class of fire reaction			Fca			EN 50575, EN 13501-6

Number of Fibers	Cable Code (Ordering Code)	Delivery length, Packing
2	OPK-U-DSTTAC-2(2x0.9)N9AAUGU-xx-BK	2100 m ± 5% on plywood reel
4	OPK-U-DSTTAC-4(4x0.9)N9AAUGU-xx-BK	2100 m ± 5% on plywood reel
6	OPK-U-DSTTAC-6(6x0.9)N9AAUGU-xx-BK	2100 m ± 5% on plywood reel
8	OPK-U-DSTTAC-8(8x0.9)N9AAUGU-xx-BK	2100 m ± 5% on plywood reel
12	OPK-U-DSTTAC-12(12x0.9)N9AAUGU-xx-BK	2100 m ± 5% on plywood reel

xx – fibre type (see Cable code datasheet)

Fibre Type	Singlemode 9/125	Multimode 50/125	Multimode 62.5/125
Wavelength	1310 nm / 1550 nm	850 nm / 1300 nm	850 nm / 1300 nm
Max. Attenuation	0.5 dB/km / 0.5 dB/km	3.5 dB/km / 1.5 dB/km	3.5 dB/km / 1.5 dB/km

Print legend: Manufacturer - Cable type – lot number- length marking per 1 m (customer print legend available on request)

Note: Cable marking using the Hot-foil method is done in white. If overprinting is necessary, the colour of the text is yellow.



Jacket with rodent and termite chemical deterrent version available

OPTOKON Kable Co., Ltd., s.r.o. reserves the right to make changes in this specification without prior notice.

OPTOKON KABLE Co., Ltd., s.r.o. | Kouřimského 2500, 393 01 Pelhřimov, Czech Republic | SALES@OPTOKONKABLE.COM | WWW.OPTOKONKABLE.COM