

KSHT-106

Fiber Optic Splice Closure

Description:


The **KSHT-106** is designed as a multi-functional equipment for optical cable splice, distribution and protection, it can be used for access or branch between optical cables with 6 cable entry/outlet, capable for wide application, excellent sealing performance and easy for installation, and can be deployed for direct buried, wall mount and areal environments.

The selected high strength engineering plastic material to assure superior protection capability from harsh environment such like aging, corrosion, temperature and superior of mechanical strength.



Features:

- May be used for cut, uncut and taut sheath applications
- May be used for all fiber optic cable
- Sheath retention & central strength member fasten system included
- Ribbed closure construction and lightweight plastic provides strength
- Resistance to chemical and UV attack
- Installation and reentry with a minimum of tools
- Re-enterable and reusable
- All hardware are included
- Protection class: IP 68
- ROHS compliance




Application:

Duct Mounting, Aerial Mounting, Wall Mounting

Specifications:

Model No	Size (mm) L x W x H	Spliced fiber storage capacity	Cable ports	Splice trays
KSHT-106	432 x 186 x 100	Standard fiber, 96 splices (4x24 splices)	4 ports: each port for 1 cable with max dia 22 mm	Max.4 trays, (24 splices), each tray up to 24 splices

Optional accessories:

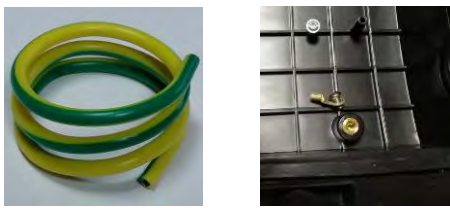 <i>Hanging hook</i>	 <i>Air valve</i>	 <i>Grounding device</i>
--	---	---

Ordering code:

KSHT-106	-	X	-	X	-	(X)
		Numbers of Trays 1x24 ÷ 4x24			Numbers of Fibers 1 ÷ 96	Optional Accessories HH Hanging hook AV Air valve GD Groundig device

Example of product:



Opened KSHT-106-4x24-96



Closed KSHT-106-4x24-96 with accessories