
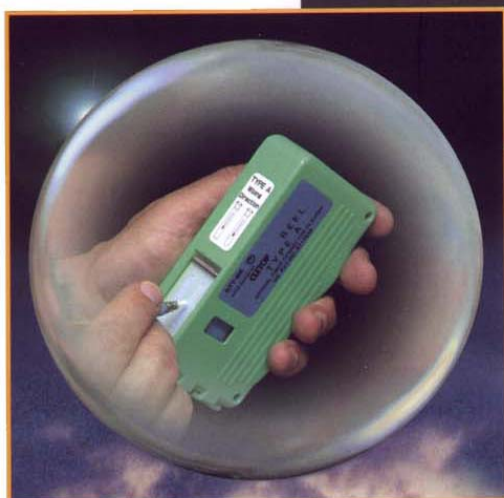


CLETOP Cassette CLETOP Stick

OPTOKON introduces the CLETOP Cassette and CLETOP Stick to provide an excellent clean.

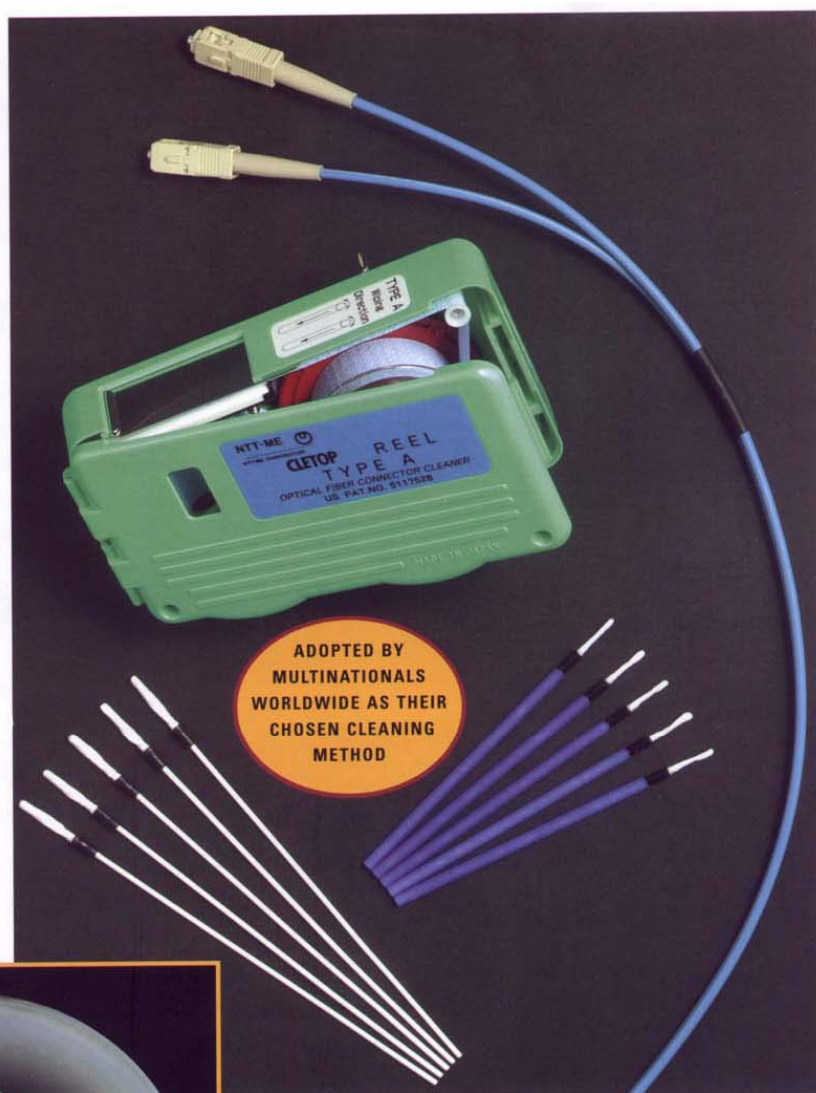

CLEAN CONNECTORS - CLEAR COMMUNICATIONS


You can now improve performance and save money with NTT-ME technology - the CLETOP cassette and CLETOP stick. Both products use the same specially formulated dry cloth to provide an excellent clean. Not only does this method of cleaning present a substantial cost saving per clean over conventional methods for high volume applications, it is also very easy to use as well as being safe and clean.

The CLETOP does away with cleaning fluids such as isopropyl alcohol which are not only toxic and flammable, but also leave a residue on the fibre ends after cleaning. The CLETOP cloth is extremely effective in the removal of oil, grease, dust and other contaminants from ferrule surfaces.

WHY SHOULD YOU CLEAN YOUR CONNECTORS

- *Dirt can cause pits and scratches on the ferrule end-face*
- *Dirty connectors may damage their mated counterparts*
- *Dirt can increase attenuation*
- *Dirt can increase digital bit error rates*
- *Dirt can reduce bandwidth*

WHY SHOULD YOU CLEAN YOUR CONNECTORS

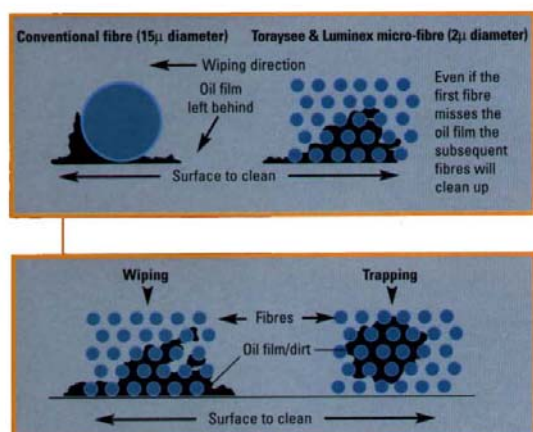

Wiping the surface with a conventional 15 micron fibre cloth leaves a trail of dirt behind.

The 2 micron fibre of the CLETOP cloth lifts all dirt through capillary action, trapping the dirt in the "micro pockets" inside the cloth.

CLETOP reel-type

Life time over 400 wipes per replacement reel		
Size	130 mm x 75 mm x 40 mm	
CLETOP A-Connector Types	SC, FC, ST, SMA, D4, DIN, Diamond, LC, MU	
CLETOP B-Connector Types	MT, Biconic, LC, MV	
<i>CLETOP stick-type</i>		
Size available	2.5 mm stick	1.25 mm stick
Length of stick	147 mm	101 mm
Connector/adaptor types	FC, ST, SC, SMA, D4, Diamond	LC, MU